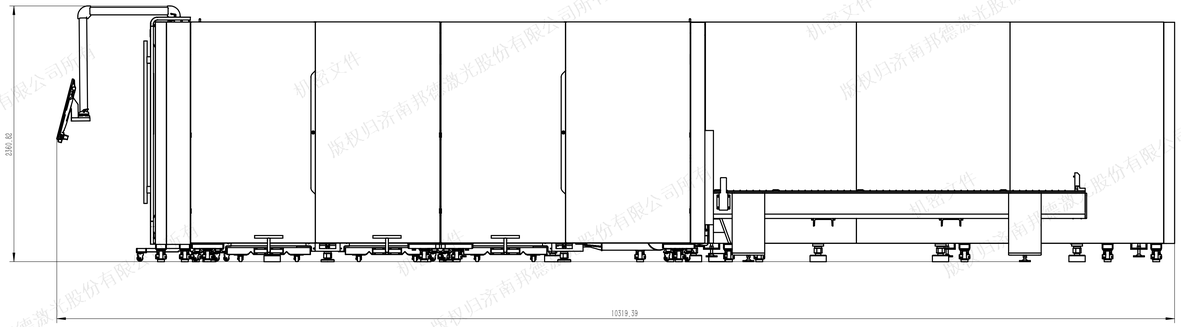

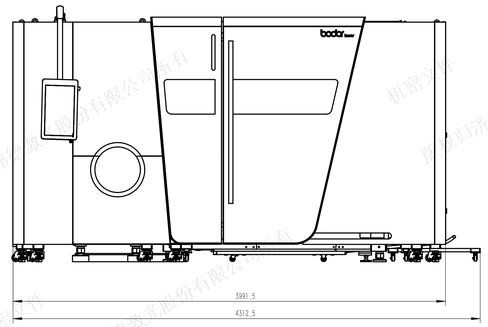

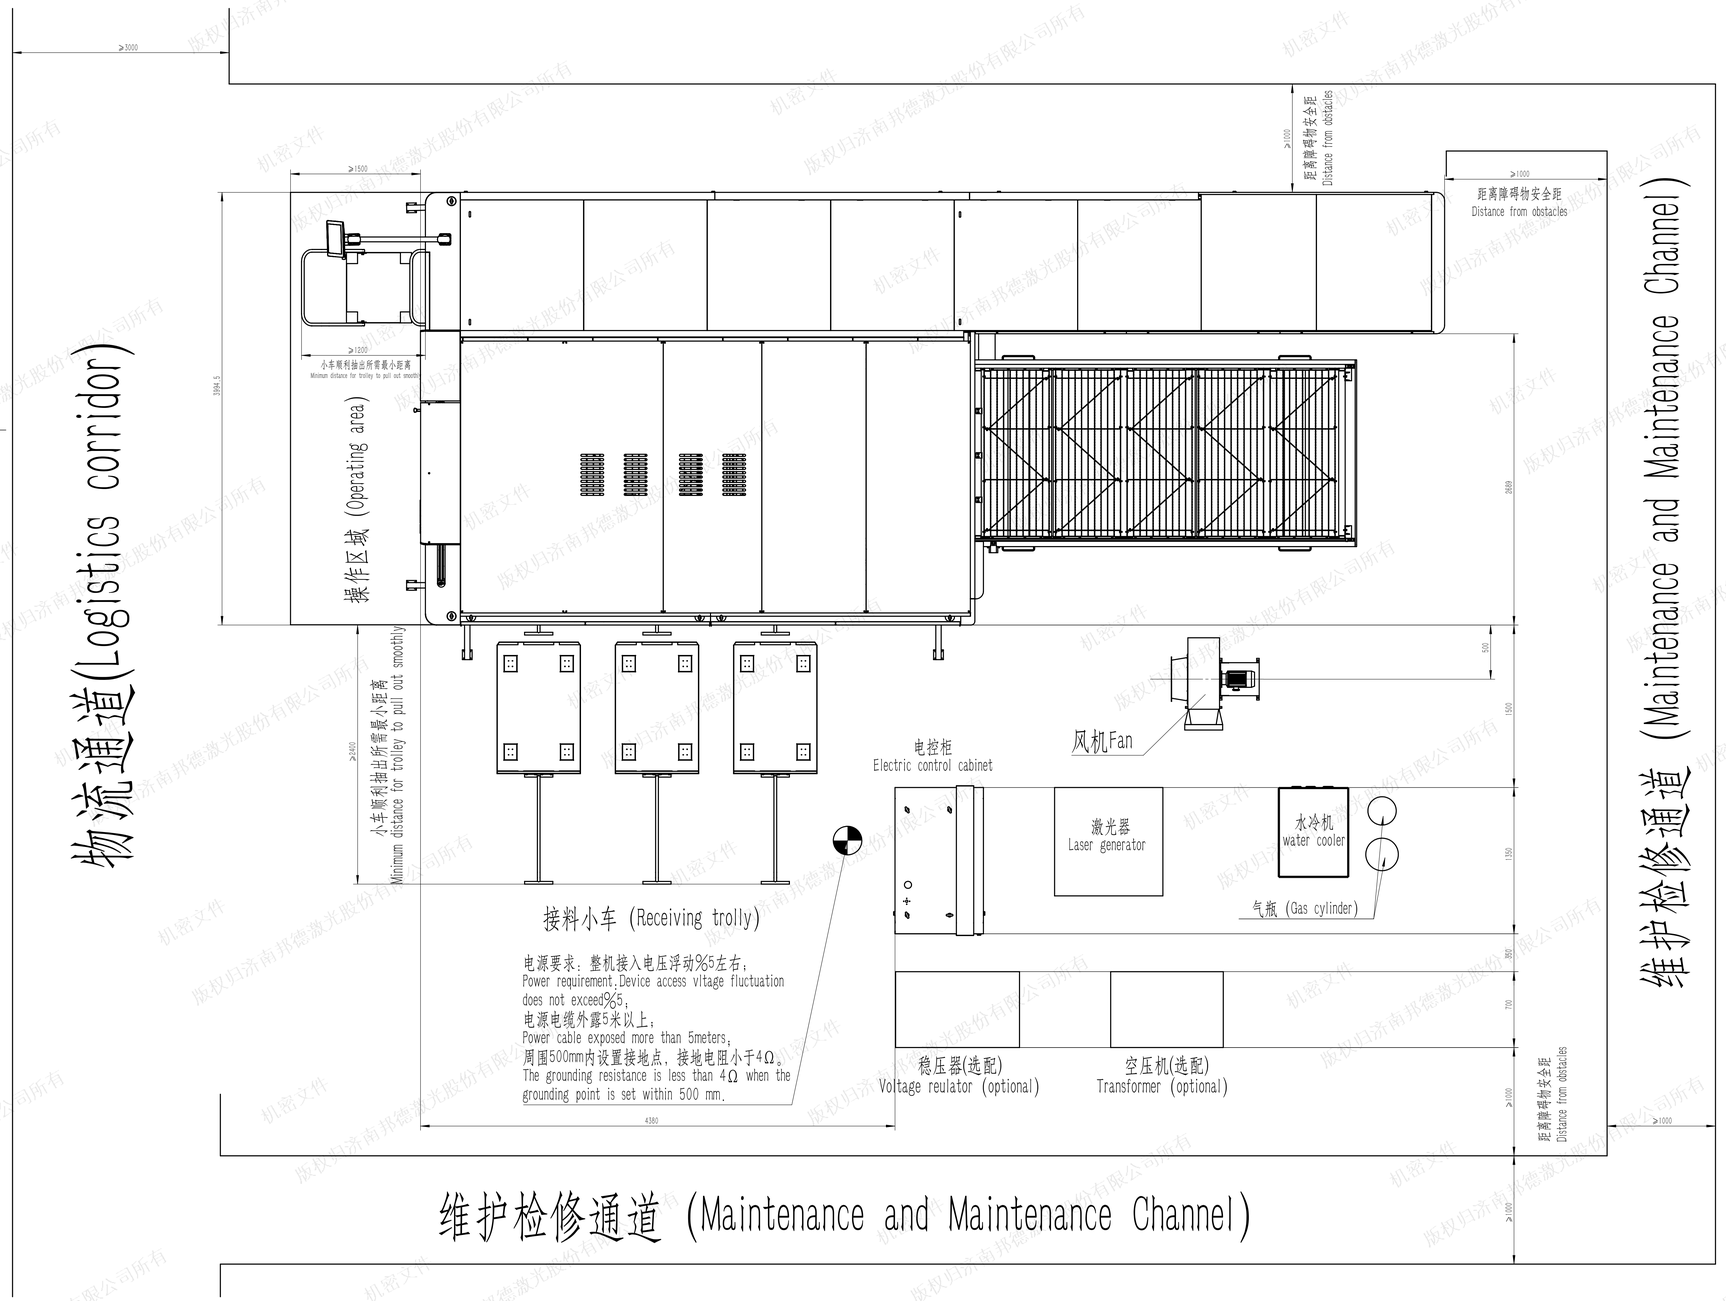

设备布置要求

Equipment layout requirements

1. 整机应远离震源；
   The equipment should be awau from the vibration source;
2. 整机就位场地平整度应不大于5mm；
   Field ground flatness not greater than 5 mm;
3. 整机接入电压浮动在±5%以内，电源电缆外露5米以上。周围500m内设置接地点，接地电阻小于4Ω；
   Power requirement:Device access vltage fluctuationdoes not exceed%5;Power c able exposed more than 5meters.The grounding resistance is less than 4Ω when thegrounding point is set within 500 mm;
4. 施工前核对基础地脚螺栓孔位置尺寸，并清理基础周围杂物；
   Check the location and dimensions of the foundation bolt hole before construction, and clean up the debris around the foundation;
5. 安装结束后，床身地脚在调试结束后需要与基础上的预埋钢板焊接成整体；
   After installation,the bed foot needs to be welded to the embedded plate after debugging;
6. 风机及气源请自行放置在不影响使用的位置；
   Fan and gas source interface placed in a position that does not affect the use of the equipment,Voltage regulator is non-standard equipment,if you choose,please contact the Technical Deqartment;
7. 注意结合地基图，可自行设置地沟桥架等；
   Pay attention to the foundation drawing,you can set up the bridge tray of the trench and so on;
8. 本图纸仅供参考，客户可依据自身需要布置，如影响线缆长度应及时告知邦德。
   This drawing is for reference only and customers can arrange it according to their own needs.If the cable length is affected,we should be informed in time.

注：此布置图中稳压器、空压机、均属于选配物料。

Note:The regulator and air compressor in this layout are all selected materials.

													随机文件 Random file	济南邦德激光股份有限公司 (Bodor Laser Co., Ltd.)	
标记	处数	分区	更改文件号	签名	年 月 日									设备布置图 The layout of the equipments	
设计			工艺								阶段标记	质量	比例		
审核			审定										1:20	CST-VI.0-X8	
			批准								共 张	第 张	版本	替代	